




PAINT & VARNISH REMOVER

Basic Uses: interior/exterior for removing paints and varnishes

SOLVENT

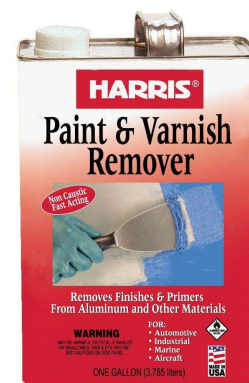

TECHNICAL DATA

VISCOSITY: 65-70 KU's
FLASH POINT: Less than 156° F
SOLIDS (WEIGHT): 6.16%
SOLIDS (VOLUME): 6.55%
pH: 9.0
DRY FILM THICKNESS: N/A
ACTIVATION TIME: 10-30 minutes

SIZES

1 quart (.946 nLiters)
1 gallon (3.785 Liters)

FINISH

N/A

COLOR

N/A

DESCRIPTION

A product that removes finishes and primers from aluminum and other materials.

surfaces, first test for suitability in a small area. User accepts all responsibility for such use.

BASIC USES

Use it to remove varnishes, primers, enamels, Polyurethane's, lacquers and most other coatings from wood, metals, concrete and other surfaces. For automotive, industrial, aircraft and marine use. It should not be used on plastics of any kind. Federal specifications do not allow its use on landing gear, supporting struts and bolts made of steel.

APPLICATION

METHOD OF APPLICATION: Using a soft natural or nylon bristle brush, apply a thick coat in one direction only. For Acrylic Lacquers allow 10 minutes for softening of paint. For Acrylic Enamels, Urethane Enamels or Epoxies allow 20-30 minutes for blistering action.

REMOVAL: When action is completed, remove from surface using a flexible putty knife or squeegee. Be sure to wear protective gloves. After scrapping the surface, rinse it with (a) water from a hose, (b) water dripped rags or steel wool, (c) solvent dripped rags (lacquer thinner, paint thinner, etc.). Allow cleaned surface to dry before application of the new finish. **WARNING!** Not recommended for use on fiberglass or plastics. Before using on unlisted

PRECAUTION

CAUTION! EXTREMELY FLAMMABLE.

Contains methylene chloride, which has been shown to cause cancer in certain laboratory animals. Risk to your health depends on level and duration of exposure. Reports have associated repeated and prolonged occupational over exposure to solvents with permanent brain and nervous system damage. Keep away from heat, sparks and flames. Do not use in basement or other unventilated areas. If you must use it in indoors, open windows and doors to ensure a continuous flow of fresh air during application drying. In case of eye contact, flush with large amounts of water for at least 15 minutes. Get medical assistance. **KEEP OUT OF REACH OF CHILDREN. DO NOT STORE IN HEATED AREAS OR UNDER DIRECT SUNLIGHT.**



(Continued)

Tung • O • Var Marine Clear Spar Varnish

